



EZ Wireless N Router RT-N11



EZ Wireless N Router RT-N11

- EZConfig
- EZManagement
- EZSpeedUp




1. Feature

- **EZConfig** – Wi-Fi Protected Setup (WPS) and EZSetup let users setup secure Wi-Fi network


EZSetup – Support WPS(Wi-Fi Protected Setup) and Press & Click to create Wi-Fi Protected safety network



Windows Connect Now (WCN) – Works perfectly with Windows Vista Wireless LAN Setup.

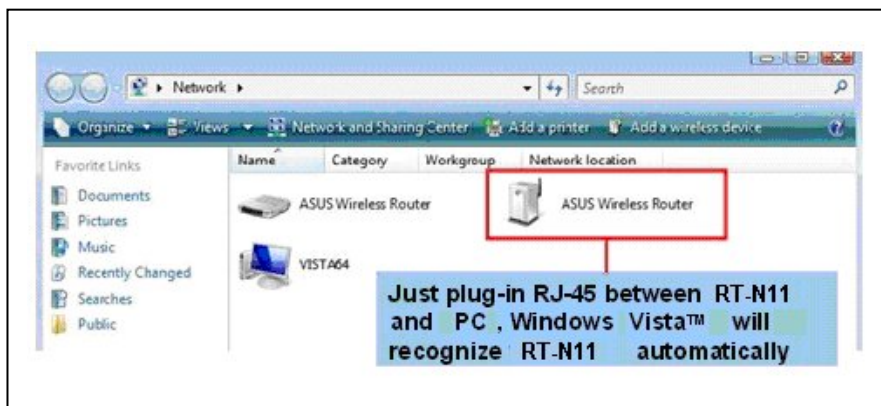

- **EZManagement** – Easily to create VIP Zone for friends to enjoy their own Wi-Fi security and bandwidth

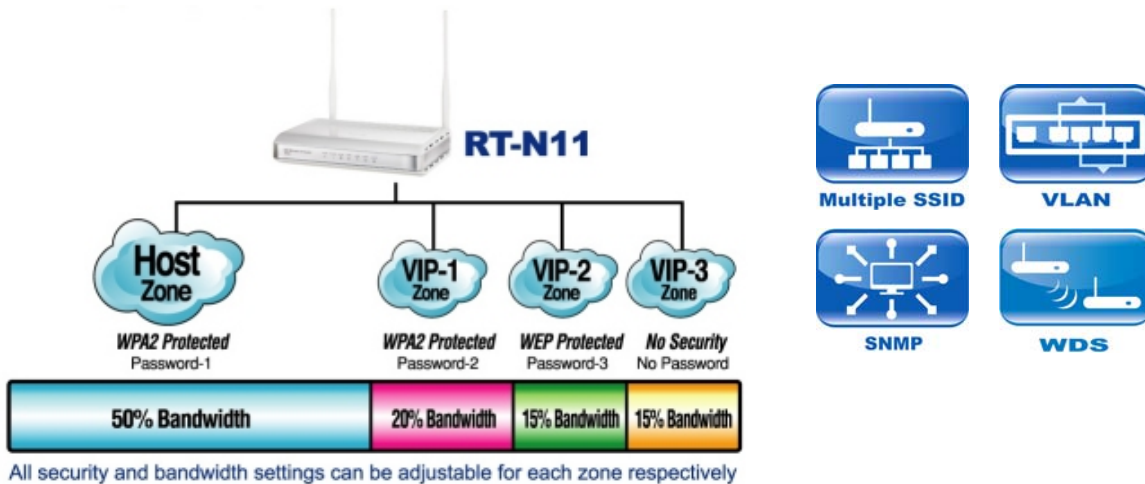

- **4 networks in 1** – With 3 extra **VIP Zones**, friends in each zone can enjoy their own Wi-Fi security and bandwidth
- Support **SNMP** to manage your RT-N11 remotely and easily
- Complete functions to fit with various usage scenarios – support **Multiple SSID, VLAN, WDS, WMM**

- **EZSpeedUp** –Interoperatable with 802.11n devices to provide faster speed and broader coverage



Adopt **MIMO (Multiple Input Multiple Output)** technology to provide best performance



EZ Wireless N Router RT-N11

2. Specification

Specification	
Network Standard	Compatible with 802.11b/g/n, 802.3, 802.3u, 802.1x, 802.11i, IPv4, CSMA/CA, CSMA/CD, ICMP
Operating Frequency	2.4G ~ 2.483GHz
Operation Channel	11 for N. America, 14 Japan, 13 Europe (ETSI)
Ethernet Port	WAN x 1, LAN x 4 RJ45 for 10/100 BaseT
Antenna	2 External Detachable Antenna
WPS Button	Support WPS (Wi-Fi Protected Setup) Push Button and PIN Code Setup
LED	Power x 1, AIR x 1, WAN x 1, LAN x 4
Security	64/128-bit WEP, WPA-Personal, WPA2-Personal, WPA-Enterprise, WPA-Enterprise, WPA-Auto(TKIP/AES), WPA2-Auto(TKIP/AES), Radius with 802.1x
Routing	Static Routing, RIP v1/v2
Firewall & Access Control	NAT Firewall, SPI (Stateful Package Inspection) Firewall, WAN Ping Control, Domain Access Control, URL Filter, MAC Filter, Inbound/Outbound Packet Filter, DoS Detection
VPN Support	IPSec / PPTP / L2TP Pass-Through
Quality of Service	<ul style="list-style-type: none">■ WMM (Wi-Fi multimedia)■ Customizable QoS rules
Advanced Network	Support up to 4 Multiple BSSIDs/ESSIDs, VLANs
Network Management	Support SNMP, IGMP, UPnP, DHCP, DNS Proxy, NTP Client, DDNS, Port Trigger, Virtual Server, Virtual DMZ, VPN Pass-Through, WDS
Power Supply	+5V with max. 1.2A current Note: Use only the adapter included in the package. Using other adapters may damage the device.
Temperature	Operating: 0~40 °C; Storage: -10~70 °C
Humidity	Operating: 10~90%; Storage: 0~90%
Dimension	179 x 119 x 37 (L x W x H) mm
Weight	310g

**All specifications are subject to change without notice.*