

## USB-BT21 Mini Bluetooth Dongle v2.0 + EDR


The USB-BT21 wireless dongle leverages Bluetooth v2.0 Technology to provide wireless freedom to Notebooks and PCs.



- **Tiny Size** and **Colorful Design** to spice your Laptops
- Latest **Bluetooth v2.0** specification with **EDR** function enables data transfer up to **3Mbps**
- Support 19 Profiles for **Windows** and 8 Profiles for **Mac OS**
- Support **A2DP** for Wireless Stereo Music Playback
- Based on **USB 2.0** for fast data transfer and power supply no extra power supply needed.

### Enrich Wireless Experience via Bluetooth

With USB-BT21, you can:

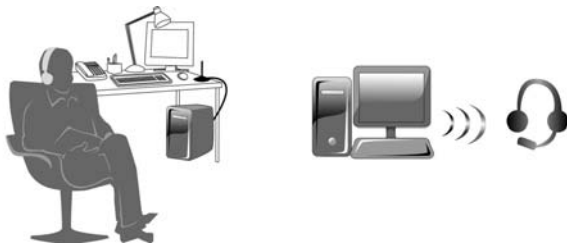

**Listen to Stereo Music or Skype with your friends wirelessly**



**Go on Internet via Bluetooth Phone even without Hotspot nearby**



**Synchronize with Bluetooth Mobile/PDA Phone**





ASUSTek COMPUTER INC.

ASUSTeK COMPUTER INC.  
15, Li-Te Rd., Peitou, Taipei, Taiwan.  
Tel: +886-2-28943447  
Fax: +886-2-28950114

## Specification

Model	USB-BT21
Standard	Bluetooth v2.0 + EDR
Advanced Features	Adaptive Frequency Hopping (AFH)
Interface	USB 2.0 (type A)
RF Power Class	Class 2
Data Rate	Up to 3 Mbps
Range	Up to 10 meters in free space
Bluetooth Profile for Windows®	19 Profiles for Windows (A2DP, AVRCP, BIP, BPP, DUN, FAX, FTP, GAP, GAVDP, GEOP, HCRP, HFP, HID, HSP, OPP, PAN, SDAP, SPP, SYNC)
Bluetooth Profile for Mac OS	DUN, FTP, HCRP, HID, HSP, OPP, SPP, SYNC
Frequency Band	2.400~2.4835 GHz unlicensed ISM band
Spectrum	FHSS (Frequency Hopping Spread Spectrum)
Modulation	GFSK (1Mbps), 4-DQPSK (2Mbps), 8-DPSK (3Mbps)
Antenna	Printed Antenna
Utility Language Support	Automatic 17 language discovery(English, French, Swedish, Finnish, Japanese, German, Portuguese, Dutch, Chinese Traditional, Chinese Simplified, Norwegian, Danish, Spanish, Korean, Italian, Russian, Polish)
Input Power	DC 5V (via USB Port)
LED Indicator	Power/Active
OS Support	Windows 2000 / XP / Vista Mac OS X.3 or above
Security	Pairing, Encryption, Authentication (RAND 128 bits)
Physical Dimensions	16.6 x 20.4 x 8.6 mm (L x W x D)
Weight	2g
Operating Temperature	0°C ~ 60°C (32°F ~ 140°F)
Storage Temperature	-10°C ~ 70°C (14°F ~ 158°F)
Humidity	5~90% non-condensing