

WL-BTD202

Stylish Design & Extension




WL-BTD201M


Broad Range & Best Mobile Mate



Listen to Stereo Music or Skype

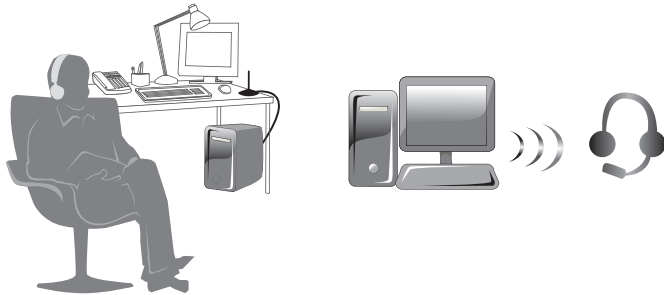


Internet Access via Bluetooth Handset

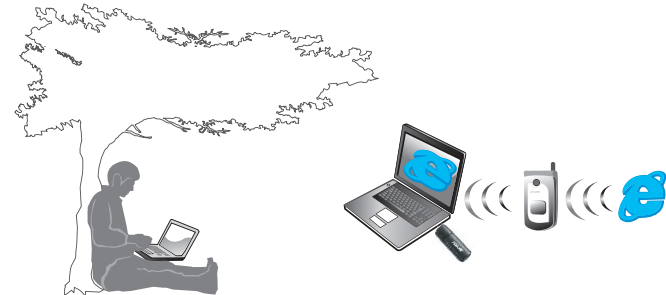

Synchronize with Bluetooth Handset/PDA Phone



Type SMS Message on PC/NB and Send via Bluetooth Handset

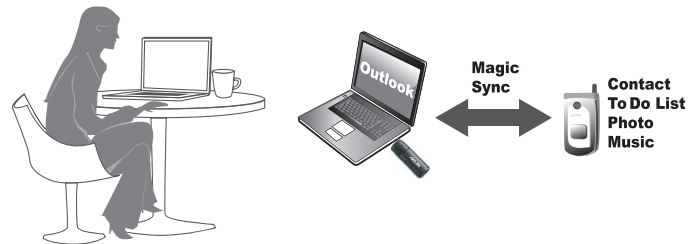

WL-BTD202 SPECIFICATIONS	
Standard	• Bluetooth v2.0 Class 2 + EDR
Advanced Features	• Adaptive Frequency Hopping (AFH)
Interface	• USB 2.0 (type A)
RF Power Class	• Class 2
Data Rate	• Up to 3 Mbps
Range	• Up to 40 meters in free space
Bluetooth Profile for Windows	• 19 Profiles for Windows (A2DP, AVRCP, BIP, BPP, DUN, FAX, FTP, GAP, GAVDP, GEOP, HCRP, HFP, HID, HSP, OPP, PAN, SDAP, SPP, SYNC)
Bluetooth Profile for Mac OS	• DUN, FTP, HCRP, HID, HSP, OPP, SPP, SYNC
Frequency Band	• 2.400~2.4835 GHz unlicensed ISM band
Spectrum	• FHSS (Frequency Hopping Spread Spectrum)
Modulation	• GFSK (1Mbps), 4-DQPSK (2Mbps), 8-DPSK (3Mbps)
Antenna	• Printed Antenna
Utility Language Support	• English, French, Swedish, Finnish, Japanese, German, Portuguese, Dutch, Chinese Traditional, Chinese Simplified, Norwegian, Danish, Spanish, Korean, Italian, Russian, Polish
Input Power	• DC 5V (via USB Port)
LED Indicator	• Power/Active
OS Support	• Windows 98 / SE / ME / 2000 / XP • MAC OS version 10.3 or above
Output Power (GFSK)	• 0dBm (typical)
Receiving Sensitivity (GFSK)	• -82dBm (typical)
Physical Dimensions	• 58.5 x 17 x 8mm (L x W x D)
Weight	• 6.8g

WL-BTD201M SPECIFICATIONS	
Standard	• Bluetooth v2.0 Class 1 + EDR
Advanced Features	• Adaptive Frequency Hopping (AFH)
Interface	• USB 2.0 (type A)
RF Power Class	• Class 1
Data Rate	• Up to 3 Mbps
Range	• Up to 100 meters in free space
Bluetooth Profile for Windows	• 19 Profiles for Windows (A2DP, AVRCP, BIP, BPP, DUN, FAX, FTP, GAP, GAVDP, GEOP, HCRP, HFP, HID, HSP, OPP, PAN, SDAP, SPP, SYNC)
Bluetooth Profile for Mac OS	• DUN, FTP, HCRP, HID, HSP, OPP, SPP, SYNC
Frequency Band	• 2.400~2.4835 GHz unlicensed ISM band
Spectrum	• FHSS (Frequency Hopping Spread Spectrum)
Modulation	• GFSK (1Mbps), 4-DQPSK (2Mbps), 8-DPSK (3Mbps)
Antenna	• Printed Antenna
Utility Language Support	• English, French, Swedish, Finnish, Japanese, German, Portuguese, Dutch, Chinese Traditional, Chinese Simplified, Norwegian, Danish, Spanish, Korean, Italian, Russian, Polish
Input Power	• DC 5V (via USB Port)
LED Indicator	• Power/Active
OS Support	• Windows 98 / SE / ME / 2000 / XP • Mac OS X.3 or above
Output Power (GFSK)	• 10±3dBm (typical)
Receiving Sensitivity (GFSK)	• <-86dBm at <0.1% BER
Physical Dimensions	• 52.4 x 18.5 x 9.4 mm (L x W x D)
Weight	• 6.3g